

Industrial Gland Kits

CW LSOH Brass Gland Kit LSF - CW Series



Application

- > Indoor/outdoor type for SWA cable

Features & Benefits

- > Brass indoor and outdoor cable gland & accessories
- > For circular, galvanized-steel single-wire-armour plastic or rubber sheathed cables
- > Outer seal grips sheath of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring, ideal for checking electrical continuity
- > Kit comprises:
 - CW Gland
 - Brass earth tag
 - Brass locknut
 - LSF shroud

- > 2 per kit up to and including 25mm size

Technical Data

- > EN 50262
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > CuZn39Pb3 extruded brass alloy used for guaranteed strength and performance
- > Zero Halogen Silicone seals and shrouds - LUL approved



Ref: CWLSOH/05/08 **Prysmian Cables & Systems Limited**, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK
 Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465
www.prysmian.co.uk




WOKING
 Unit 19, Woking Business Park, Albert Drive,
 Woking GU21 5JY
 Tel: 01483 747747 • Fax: 01483 747001

BRISTOL
 The Alpha Centre, Armstrong Way, Great Western
 Business Park, Yate, Bristol BS37 5NG
 Tel: 01454 322555 • Fax: 01454 323555

NORTON CANES
 Unit 15-16, Bellsizes Close, Norton Canes,
 Staffordshire WS11 9TQ
 Tel: 01543 450555 • Fax: 01543 450600

CW LSOH Brass Gland Kit LSF - CW Series

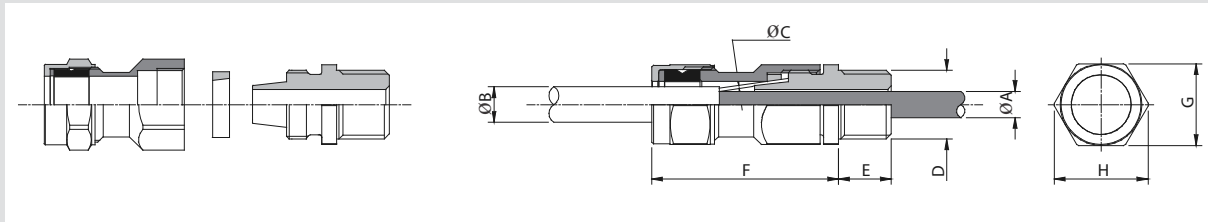

Gland Details

Cable Dimensions mm				Kit Reference			Gland Dimensions mm				
Under Armour Diameter A Max	Overall Diameter B		Armour Wire Diameter C	Size	Design Number	Items Per Pack	Entry Thread		Approx. Length From Shoulder F	Hexagon Size	
	Min	Max					Size D	Length E		Across Flats G	Across Corners H
8.6	8.0	13.2	0.9	20SS	LSF20SSCW	2	M20 × 1.5	10	44	23.4	26.7
11.6	8.0	15.8	0.9	20S	LSF20SCW	2	M20 × 1.5	10	46	25.7	29.2
13.9	11.7	20.8	0.9 / 1.25	20	LSF20CW	2	M20 × 1.5	10	46	30.5	34.0
19.9	17.0	27.2	1.25 / 1.6	25	LSF25CW	2	M25 × 1.5	10	51	37.6	42.2
26.2	23.5	33.5	1.6 / 2.0	32	LSF32CW	1	M32 × 1.5	10	56	47.3	53.6
32.1	29.0	39.9	1.6 / 2.0	40	LSF40CW	1	M40 × 1.5	15	59	56.4	61.5
38.1	38.0	46.2	2.0 / 2.5	50S	LSF50SCW	1	M50 × 1.5	15	64	65.5	72.1
44.0	39.5	52.6	2.0 / 2.5	50	LSF50CW	1	M50 × 1.5	15	64	70.1	77.2
55.9	51.3	65.3	2.5	63	LSF63CW	1	M63 × 1.5	15	67	80.0	87.4
67.9	62.5	78.0	2.5	75	LSF75CW	1	M75 × 1.5	15	76	98.8	109.2

WOKING

Unit 19, Woking Business Park, Albert Drive,
Woking GU21 5JY
Tel: 01483 747747 • Fax: 01483 747001

BRISTOL

The Alpha Centre, Armstrong Way, , Great Western
Business Park, Yate, Bristol BS37 5NG
Tel: 01454 322555 • Fax: 01454 323555

NORTON CANES

Unit 15-16, Bellsizes Close, Norton Canes,
Staffordshire WS11 9TQ
Tel: 01543 450555 • Fax: 01543 450600