

**Section**

MV Insulation

**Application**Field  
Laboratory**PRODUCT BENEFITS**

No setting needed

**TOOL CAPACITY**

|                 |                                  |
|-----------------|----------------------------------|
| <b>Diameter</b> | 38 - 60 mm<br>1,496 - 2,362 inch |
|-----------------|----------------------------------|

|                             |     |
|-----------------------------|-----|
| <b>Angle of the chamfer</b> | 30° |
|-----------------------------|-----|

**TOOL DIMENSIONS**

|               |        |
|---------------|--------|
| <b>Length</b> | 280 mm |
|---------------|--------|

|              |        |
|--------------|--------|
| <b>Width</b> | 100 mm |
|--------------|--------|

|               |       |
|---------------|-------|
| <b>Height</b> | 45 mm |
|---------------|-------|

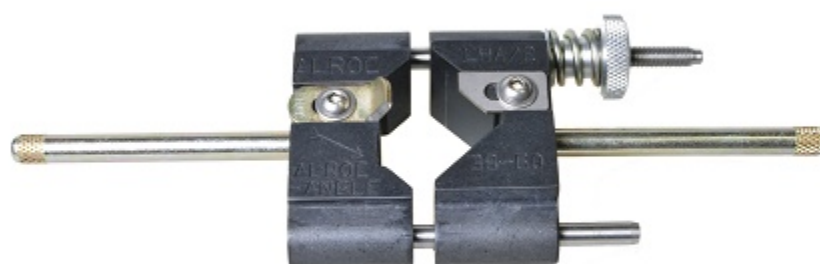
|                           |         |
|---------------------------|---------|
| <b>Weight without box</b> | 0,75 Kg |
|---------------------------|---------|

|                  |     |
|------------------|-----|
| <b>Packaging</b> | Box |
|------------------|-----|

## Tool to chamfer insulation

**TO DO WHAT**

The LHA2 enables the user to realise a chamfer of 30° at the extremity of the insulation of MV cables

**Spare part**

LHAC - Spare blade chamfer insulation

**Associated tool**

BRMRD1E - Tool to remove insulation

ROTO-TMG - Connector holder for bolted and clamping connections

122818 - Allen key size 3mm

**ALROC SAS**Z.I. de la Fonderie - 72160 TUFFE  
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

# LHA2



| Part Number | Diameter                       | Tool capacity        | Dimensions          |                    |                   | Packaging |
|-------------|--------------------------------|----------------------|---------------------|--------------------|-------------------|-----------|
|             |                                | Angle of the chamfer | Length              | Width              | Height            |           |
| LHA         | 14 - 40 mm<br>0,551 - 1,575 in | 30°                  | 275 mm<br>10,827 in | 75 mm<br>2,953 in  | 45 mm<br>1,772 in | box       |
| LHA/60      | 20 - 55 mm<br>0,787 - 2,165 in | 30°                  | 265 mm<br>10,433 in | 105 mm<br>4,134 in | 45 mm<br>1,772 in | box       |
| LHA2        | 38 - 60 mm<br>1,496 - 2,362 in | 30°                  | 280 mm<br>11,024 in | 100 mm<br>3,937 in | 45 mm<br>1,772 in | box       |