


TROF C1/43 is provided as a base unit with lid only.
Please refer to additional options below as per your project-specific requirements.

PRODUCT INFORMATION	
WEIGHT	25kg
EXTERNAL DIMENSIONS (mm)	413H, 440W, 1034L
INTERNAL DIMENSIONS (mm)	285H, 352W, 1034L
MATERIAL	Recycled polymer
FIRE RETARDANT CHARACTERISTICS	Self-extinguishing
MANUFACTURING PROCESS	Injection moulded
BEND / TILT CHARACTERISTICS	Designed into the product for ease of install
PRODUCT BENEFITS	
LIGHTWEIGHT	Higher installation rates / lower installation costs
MATERIAL HANDLING	Reduced site & RRV handling
STRENGTH	Tested to withstand site traffic with lid reinforced with Durbar plate
SECURITY	Anti-vandal and anti-theft features
QUALITY	ISO 9001 Injection moulding process
ENVIRONMENTALLY FRIENDLY	Recycled polymer material / off-cut recovery scheme
PRODUCT INTERFACES	With other Trojan Services products and concrete troughs
HEALTH, SAFETY & ENVIRONMENT COMPARISON	
TROTROF C1/43	CONCRETE TROUGH
ONE PERSON LIFT	Mechanical handling required
CUT USING STANDARD TOOLS	Cut with a petrol disc cutter
NO DUST OR NOISE PRODUCED	Dust and noise produced
SMOOTH SURFACE FINISH	Abrasive surface finish
MEDIUM CARBON FOOTPRINT	High carbon footprint
RECYCLABLE	Cannot be recycled
ADD-ONS TROTROF C1/43	
1 DIVIDER	hello@trojan-services.com for further information
DURBAR PLATE WITH SCREWS	hello@trojan-services.com for further information



CONTACT AND ORDERS FOR UNITED KINGDOM

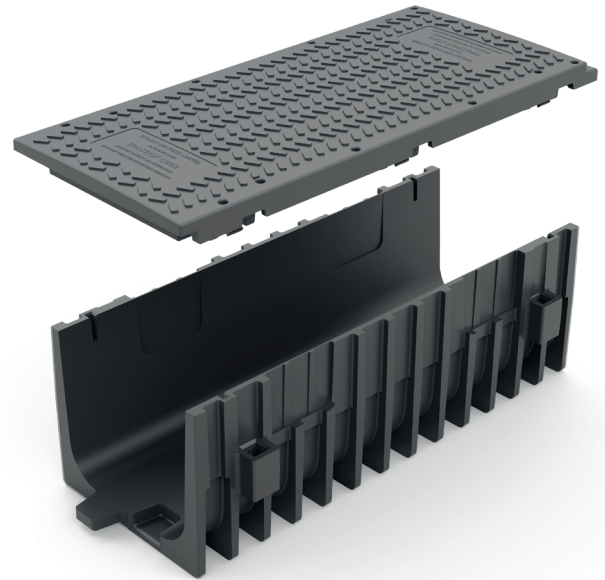

Email troughing@trackwork.co.uk **Phone** +44 1302 888666

WWW.TROJAN-SERVICES.COM - HELLO@TROJAN-SERVICES.COM